



## Ku Band Satellite Communication Duplexer

### 【Product introduction】:

Contains two duplexers. Features: compact structure, low insertion loss, in phase, great rejection.

### 【Technical indicators】:

1. Working frequency: RX: 12.0~13.0GHz

TX: 14.0~14.5GHz

2. VSWR: 1.22:1 MAX

3. Insertion loss: 0.45dB MAX


4. Isolation: TX/RX 90dB MIN

RX/TX 50dB MIN

5. Phase coherence:  $\pm 3^\circ$  MAX

6. Interface: Non-standard WR75

7. Structure:

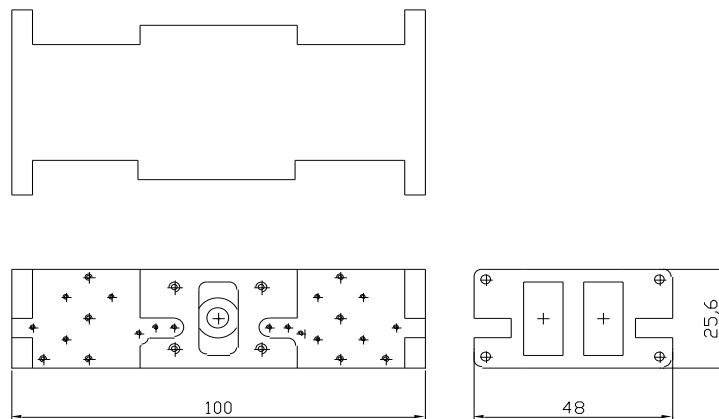

## Ku Band Satellite Communication Duplexer



## Ku Band Satellite Communication Duplexer


Address: No. 18, Chengzhi Road. Chenghua District. Chengdu City. China. 610053

Tel: +86-021-86780908

Email: jamesruiwang@163.com



Chengdu Sanlianweixun Technology Co., Ltd.

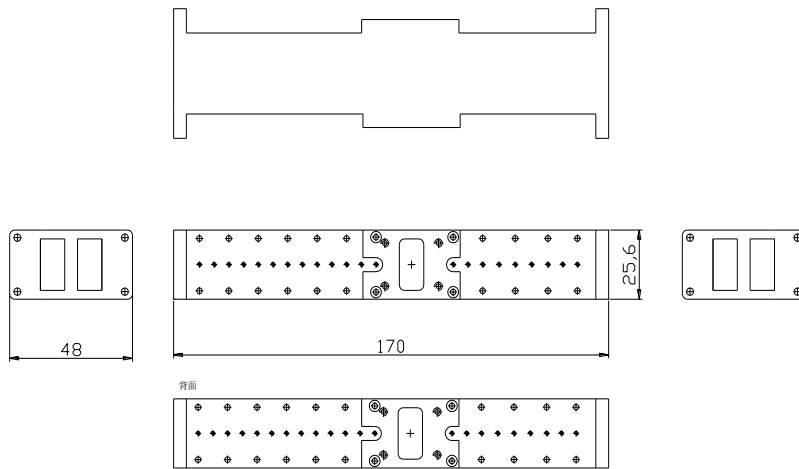

Ku Band Satellite Communication Duplexer



Ku Band Satellite Communication Duplexer