




Ku Band Satellite Communication Duplexer (Type B)

【Product introduction】 :

Features: great rejection, small phase variation.

【Technical indicators】 :

1. Working frequency: RX: 12.25~12.75GHz
TX:14.00~14.50GHz
2. VSWR: 1.22:1 MAX
3. Insertion loss: 0.40dB MAX
4. Isolation: TX/RX: 90dB MIN
RX/TX: 62dB MIN
5. phase coherence: $\pm 3^\circ$ MAX
6. Interface: Common port: Non-standard WR75;
RX: Non-standard WR75 flange;TX: SMA-K
7. Structure:

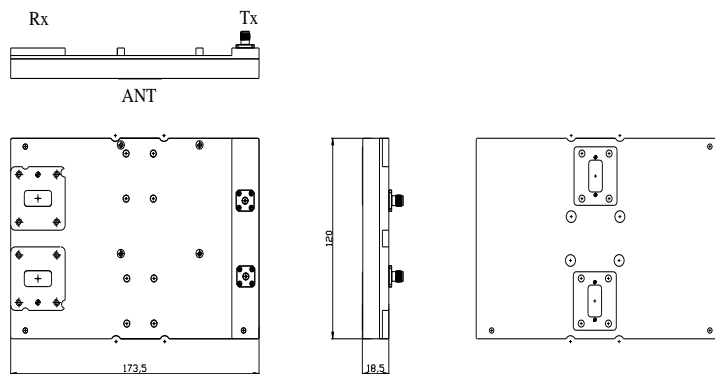

Ku Band Satellite Communication Duplexer (Type B)



Ku Band Satellite Communication Duplexer (Type B)