




### K/Ka band different frequency OMT

**【Product introduction】 :**

Features: low insertion loss, great isolation.

**【Technical indicators】 :**

1. Working frequency: RX: 17.7~21.2GHz  
TX: 29.0~31.0GHz
2. VSWR: 1.15:1 MAX
3. Insertion loss: 0.15dB MAX
4. Isolation: 35dB MIN
5. Interface: Common port: circular waveguide  $\Phi$  11.6; other ports: WR42、WR28
6. Structure:

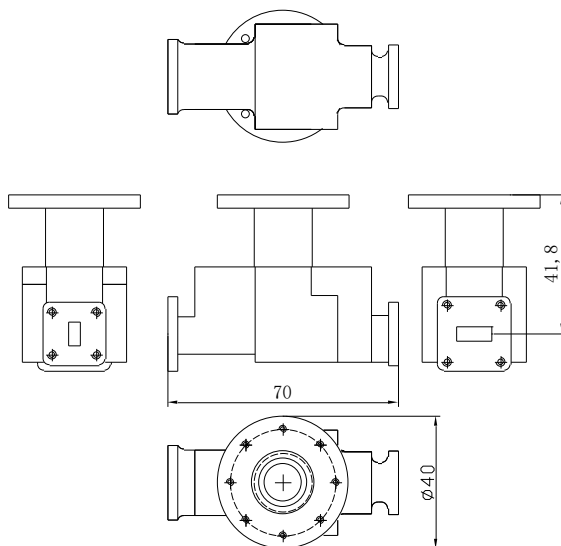

K/Ka band different frequency OMT



K/Ka band different frequency OMT